

Now is the Time... Take Your Performance to a New Level!

Strength. Accuracy. Reliability.

Designed for the most demanding jobsite conditions.

To be more productive on today's construction sites, you need equipment that stands up to the toughest jobsite conditions. This is even more critical in the underground drainage industry where underground elements can be tough on your equipment. With this in mind, CST/berger has designed the LMPL-20 PipeLaser.

The LMPL-20 is constructed from cast aluminum and is nitrogen purged, then sealed for total waterproofing. All internal components of the PipeLaser are protected and with a rugged aluminum housing, the LMPL-20 can handle the harsh demands of the underground industry.

Heavy-Duty Removable Handle Makes unit easy to carry and position, even in tight confined spaces such as manholes.

Large, Backlit LCD Display— Easy to read


Battery Pack Loads From the Top— Replacing the batteries does not disturb the laser.

Rugged Cast Aluminum Waterproof Housing— Nitrogen purged and sealed for the toughest jobsites (IP67).

Illuminated Crosshair Pivot Point LED Reference point for fast and accurate setups.



REMOTE CONTROL 59-RC20

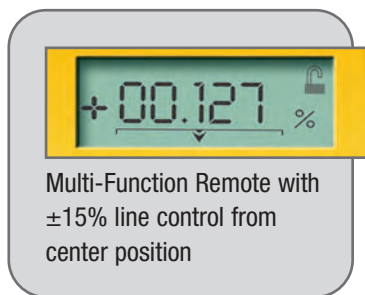

Multi-Function Remote with $\pm 15\%$ line control from center position

Next day setups are quick and easy, pipelaser remembers previous day's grade and line settings. Illuminated display makes information easy to read. Remote and PipeLaser matching keypad icons for visual recall and ease of use.



Illuminated LCD with Real-Time Information

Two-way RF control gives real-time data between remote and PipeLaser. Remote provides full-function capability to control all the menus and functions of the PipeLaser— works up to 800-feet (243m):

- Grade Control
- Line Control
- Menu Functions
- Battery Level
- Sleep and Power Modes
- Pipelaser Lock (Anti-tamper)
- Laser Pulse Mode

In the pipe

The LMPL-20 features stainless steel self-centering feet that ensure that the laser is always in position and working right each time. Just place the unit in the pipe, turn it on, and set grade....Quick, Simple, and Easy.



In the Manhole Invert

The design of the LMPL-20 base ensures that the unit can be used in a variety of manholes and inverts with the optional trivet accessory. And, since it is sealed and waterproof, don't worry about the unit getting wet!

Heavy-Duty Rubber Padded Guards Protects housing on the toughest jobsites.

Heavy Duty Removeable Legs Three (3) sets of four stainless steel self-centering legs. Rubber tipped for maximum stability, eliminates slipping and vibration.

Technical Specifications

Laser Diode:	635 - 650nm
Features:	<ul style="list-style-type: none"> • Cross Axis Self-Leveling • Auto Line Centering • Auto Grade Zeroing • LED Plumb Reference
Operating Range:	800-ft (243 m)
Grade Range:	-15%, ~ +40%
Line Range:	$\pm 15\%$
Horizontal Accuracy:	± 10 arc seconds
Power:	Rechargeable NiMH Battery Pack or Alkaline Batteries
Operating Temperature:	-4° F ~ 122° F (-20° C ~ 50° C)
Environment:	100% Waterproof— Nitrogen purged and sealed
Warranty:	Two-Year



FEATURES

- Large, Illuminated LCD Display** make information easy to see and use.
- Easy Grade Input**— enter by individual digit for quick setup changes
- Two-Way RF Remote Control** with real-time changes, make changes without being in the hole.
- Illuminated LED Pivot Point** makes setup easy and fast, for plumb bob setups.
- Lock Grade and Line Feature** to prevent changes after setup.
- Battery Indicator** monitors battery level of Ni-Mh and Alkaline battery packs.
- Sleep Mode** turns off laser beam, display, and auto-leveling. Pipelaser wakes up with any control input from main keypad or remote.

STANDARD PACKAGE

(59-LMPL20 shown) The right tool makes all the difference.

- RF Remote Control
- Target Set
- Hard Shell Carrying Case
- Rechargeable Ni-MH Battery Pack
- Alkaline Battery Pack
- Battery Charger
- 12V External Power Cord
- Leg Set for 8-10-12" Pipe
- Instruction Manual



Multi-Function Menus for quick access to: unit settings (percent or permil), laser power level, calibration information, and entry of owner information. Owner information and calibration is password protected.