

Connectors

Carabiners & Hooks

Snap Hook



FP6650



FP4651

Large Snap Hook



FP92/2HQ



FP5395



FP5386

Carabiner



FP83



FP85



FP86



FP86B



FP87



FP88



FP89

Anchorage Connector



FP93M



FP95M




FP96M


FP99

The most overlooked piece of equipment is often at the end of a lanyard or other piece of fall protection equipment. Connectors or connecting links do a wide assortment of jobs because they are available in a wide variety of shapes and sizes. All provide safe and secure closure and are designed for easy operation even when you have gloves on. All items listed are rated for 5,000lbs. (22kN) unless otherwise specified

SNAP HOOK




SNAP HOOK



SWIVEL LOAD INDICATING SNAP HOOK

Part No	Construction	Gate Opening (W)	Width (X)	Lock Type	Standard
FP6650	Drop Forged	3/4" (19 mm)	5-9/16" (141 mm)	Locking	ANSI, CSA, CE
FP4651	Drop Forged / Swivel Load Indicating Snap Hook	3/4" (19 mm)	7-19/64" (185 mm)	Locking	ANSI, CSA, CE


LARGE LOCKING HOOKS

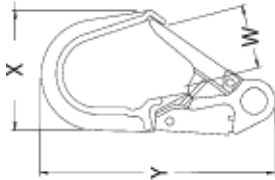

REBAR/LADDER HOOK

Part No	Construction	Gate Opening (W)	Width (X)	Length (Y)	Lock Type	Standard
FP5386	Drop Forged Rebar/ladder hook	1-3/4" (44 mm)	3-7/8" (98 mm)	7-9/16" (192 mm)	Locking	ANSI, CSA, CE
FP92/2HQ	Steel Wire Scaffold Hook	3-1/2" (90 mm)	7" (178 mm)	13" (330 mm)	Locking	4000 lbs (1800 kg)
FP5395	Drop Forged Scaffold hook/Large Eye	2-1/2" (64 mm)	4-49/64" (121 mm)	8-7/8" (225 mm)	Locking	ANSI, CSA, CE


CARBINERS




CARBINER

Part No	Construction	Gate Opening (W)	Width (X)	Length (Y)	Lock Type	Standard
FP83	Drop Forged Pear-shaped w/Captive pin	2" (51 mm)	5-1/8" (130 mm)	8-21/32" (220 mm)	Auto locking	ANSI, CSA, CE
FP85	Drop Forged Offset D	5/8" (16 mm)	2-1/2" (64 mm)	4-1/2" (114 mm)	Auto locking	ANSI, CSA, CE
FP86	Drop Forged D-shaped	36/64" (14 mm)	1-31/32" (60 mm)	4-3/32" (104 mm)	Auto locking	ANSI, CSA, CE
FP86B	Drop Forged w/Captive pin	36/64" (14 mm)	1-31/32" (60 mm)	4-3/32" (104 mm)	Auto locking	ANSI, CSA, CE
FP87	Aluminum D-shaped	3/4" (19 mm)	2-3/8" (60 mm)	4-1/2" (114 mm)	Auto locking	ANSI, CSA, CE
FP88	Drop Forged Offset D	29/32" (23 mm)	2-59/64" (74 mm)	4-31/32" (126 mm)	Auto locking	ANSI, CSA, CE
FP89	Aluminum Offset D	1" (25 mm)	2-1/2" (64 mm)	4-1/4" (108 mm)	Auto locking	ANSI, CSA, CE

ANCHORAGE CONNECTOR HARDWARE



SHEPHERD'S HOOK

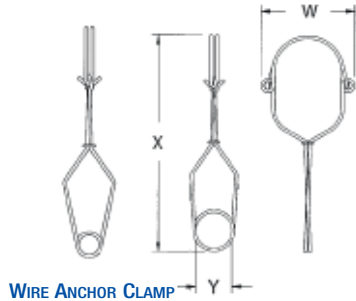

WIRE ANCHOR CLAMP

Part No	Construction	W	X	Y	Use with
FP93M	Aluminum Shepherd's Hook	3-1/2" (89 mm)	4" (102 mm)	13" (330 mm)	FP08FT/16 or FP08FT/20
FP95M	Aluminum Shepherd's Hook	7" (178 mm)	4" (102 mm)	21" (533 mm)	FP08FT/16 or FP08FT/20
FP96M	Aluminum Shepherd's Hook	12" (305 mm)	4" (102 mm)	28" (711 mm)	FP08FT/16 or FP08FT/20
FP99	Stainless Steel Wire Anchor Clamp	7-3/4" (197 mm)	17" (432 mm)	1-7/16" (37 mm)	Shock absorbing lanyard

FIRST MAN UP ACCESSORIES

A great alternative to providing overhead anchorage is to take the equipment up to the anchor. It's simple when you use a Shepherd's Hook attached to an extension pole. The hook is lifted to the anchor with the pole and secured. A rope grab and lifeline or lightweight DuraLite self-retracting lifeline provide the connection to the full body harness.



Part No	Construction	Length	Use with
FP08FT/16	Fiberglass telescopic pole	5m (16ft) long	FP93M, FP95M, FP96M, FP0776M
FP08FT/20	Fiberglass telescopic pole	6m (20ft) long	FP93M, FP95M, FP96M, FP0776M
FP0776M	Rope installer	—	—

Anchorage connectors are just another example of the wide product assortment offered by North. These types of connectors can be as varied as the places in which they are used. Some are portable, some are designed to move along with the worker and some are fixed. From beam anchors to anti-rollout D-rings, North has you connected.

MOVING ANCHORAGE CONNECTORS



Features/Benefits

- Adjustable to accommodate a wide variety of I-Beams
- Designed for use with self-retracting lifelines on horizontal I-beams
- Removable at any point of the beam
- Travels with user to eliminate the swing fall

Part No	Description
FP05	Beam trolley that mounts anywhere on a suitable metal beam - Minimum turn radius of 12" (30 mm) - Fits widths of 2.3" (50 mm) to 6.5" (165 mm)
FP05EXT	Extends fit of FP05 to 8.5" (190 mm)
FP06	Gliding beam anchor that mounts anywhere on a suitable metal beam - Can be dismantled in seconds and moved to a new location or job site - Lightweight - fits 4" (100 mm) to 12" (300 mm) widths Stainless steel construction with easy-to-use D-ring connector

FLEXIBLE ANCHORAGE CONNECTORS



Features/Benefits

- Design to couple fall arrest lanyard to anchorage
- Each Flexible Anchorage connector has min strength of 5,000lbs (22kN)
- Can be used for a variety of fall arrest applications

Part No	Description	Length
FP02/	Cable Sling - 1/4" (6 mm) galvanized steel cable with swaged eyes at each end - PVC coated against corrosion	3', 4', 5' or 6' (0.9m, 1.2 m, 1.5 m or 2 m)
FP03/	Pass Through Anchor Sling - 2" (50 mm) heavy-duty nylon web with small D-ring which passes through the large D-ring to form loop around anchor	3', 4', 5' or 6' (0.9m, 1.2 m, 1.5 m or 2 m)
FP04/	Pass Through Anchor Sling - 1" (25mm) nylon sling material with 1 D-ring that is used as the anchor connector when the webbing is loop around anchor	3', 4', 5' or 6' (0.9m, 1.2 m, 1.5 m or 2 m)
FP242/	Spectra® Web Loop Sling - Tiny'n Tough (T'nT) Sling is made of revolutionary Spectra webbing for lightweight, small size and exceptional strength - 3/4" (19 mm) web can be used without additional protective materials in concrete forming	2', 3', 4', 5' or 6' (0.6m, 0.9 m, 1.2 m, 1.5 m or 2 m)
FP09/3	Residential anchor sling - heavy-duty nylon web	3' (0.9m)

Available Only in Canada

FIXED ANCHORAGE CONNECTORS



Features/Benefits

- D-ring shape reduces rollout possibilities
- Mounting hardware required

Part No	Construction	Gate Opening (W)	Width (X)	Length (Y)
FP3730	Bolt on D-ring	4-1/4" (197 mm)	2-15/16" (75 mm)	2-13/16" (71 mm)